


# DIE CUT GASKETS MATRIX

This chart serves as a convenient reference for customers seeking to select the appropriate material for their project, all of which are readily available in our inventory.

Rubber die cut materials are essential for a wide range of applications due to their versatility, durability, and excellent sealing properties. Each type offers unique characteristics suited for specific industries and uses.



# EPDM 60 Durometer Rubber (0.040")

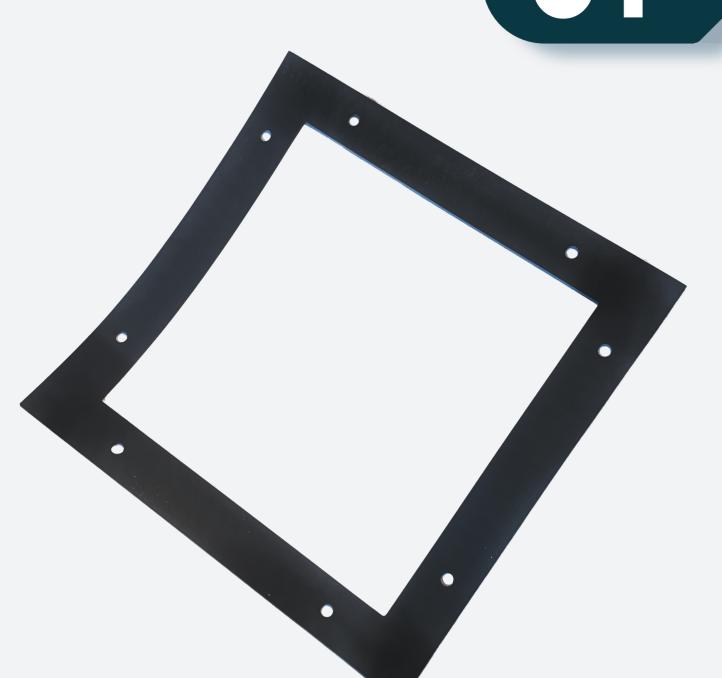

EPDM rubber widely used for sealing, lining, insulating and protecting applications. This type of rubber offers several advantages including good chemical resistance, excellent UV resistance and physical strength. It has very good resistance to UV, sunlight and ozone which makes it ideal for long term outdoor environments. It is also suitable for long term exposure to aquatic applications and will not deteriorate in fresh or saltwater.

#### Used for a variety of applications including:

- Making flange gaskets for pipes and tanks.
- Making washers, gaskets and seals for chemical applications.
- Insulating strips and isolation barriers.
- As a heat resistant skirting rubber.
- Lining of pipes and tanks.
- Underwater applications.
- Protecting steel or other surfaces.

#### COLOR



**BLACK** 

### EPDM 60 Durometer Rubber (0.187")



EPDM rubber widely used for sealing, lining, insulating and protecting applications. This type of rubber offers several advantages including good chemical resistance, excellent UV resistance and physical strength. It has very good resistance to UV, sunlight and ozone which makes it ideal for long term outdoor environments. It is also suitable for long term exposure to aquatic applications and will not deteriorate in fresh or saltwater.

#### Used for a variety of applications including:

- Making flange gaskets for pipes and tanks.
- Making washers, gaskets and seals for chemical applications.
- Insulating strips and isolation barriers.
- As a heat resistant skirting rubber.
- Lining of pipes and tanks.
- Underwater applications.
- Protecting steel or other surfaces.

#### COLORS



**BLACK** 

# BUMPON™ Polyurethane (0.031")



#### **SJ5832**

An excellent product designed to work as a spacer, stop, foot or cushion where you need to reduce vibration and reduce slip.

#### **Features:**

- Can be die cut to a variety of shapes and sizes.
- Excellent skid-resistance, high coefficient of friction.
- Excellent resistance to marring or staining.
- Long aging resiliency will not crack or harden.
- Excellent cushioning properties. • Excellent abrasion resistance.
- Vibration and shock dampening.
- Easy application pressure-sensitive backing.

#### COLORS




**BLACK** 

# WEBSITE LINK



## BUMPON™ Polyurethane (0.062")

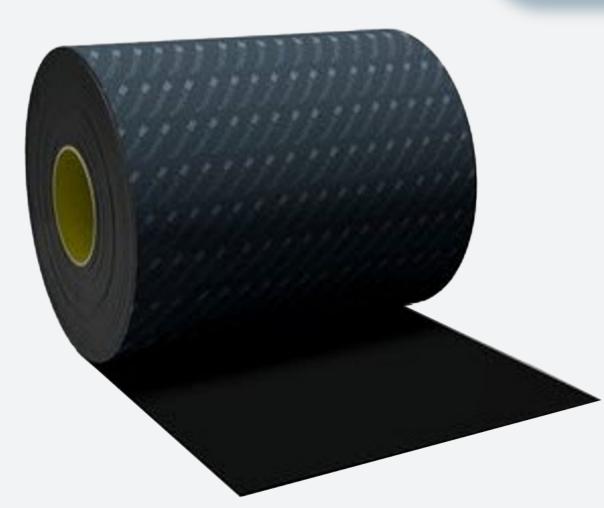

#### **SJ5816**

An excellent product designed to work as a spacer, stop, foot or cushion where you need to reduce vibration and reduce slip.

#### **Features:**

- Can be die cut to a variety of shapes and sizes.
- Excellent skid-resistance, high coefficient of friction. Excellent resistance to marring or staining.
- Long aging resiliency will not crack or harden.
- Excellent cushioning properties. Excellent abrasion resistance.
- Vibration and shock dampening.
- Easy application pressure-sensitive backing.

### COLORS



**BLACK**